



We don't just go with the flow, we create it!




34800 BENNETT • FRASER, MI 48026-1686 (586) 293-8240 • FAX (586) 293-8469

(800) 563-8006 • www.mppumps.com

FLOMAX Self Priming Pump Features

REMOVABLE FLANGES

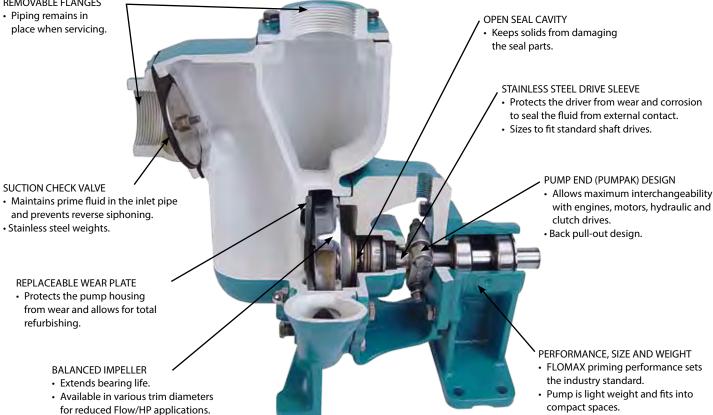

FLOMAX SELF PRIMING CENTRIFUGAL FEATURES

• Six (6) Performance Sizes Available

• Flows: To 750 GPM • Pressures: To 230 Head Feet

· Volute Material: Cast Iron Bronze

Aluminum, FM5 & FM8 only.

Stainless Steel, FM8 & FM15 only.

· Adapter Material: Cast Iron

Bronze

Aluminum, FM5 & FM8 only. Stainless Steel, FM8 & FM15 only.

• Impeller Material: Cast Iron

Bronze

Aluminum, FM5 & FM8 only. Stainless Steel, FM8 & FM15 only.

• Shaft Sleeve: Stainless Steel • Fasteners: Stainless Steel Viton, Standard · Mechanical Seal: Optional Seals Available

• Mounting Options: Close Coupled to Engine Drives

Close Coupled to Electric Motor Drives Pedestal for Long-Coupling Hydraulic Drives and Clutchpaks Pumpaks for NEMA C Face mounting



34800 BENNETT • FRASER, MI 48026-1686 (586) 293-8240 • FAX (586) 293-8469 (800) 563-8006 • www.mppumps.com





